



Non - Automatic Bilge Pumps 01 Series

Features & Benefits

Pump and switch are stand alone products
Compact, efficient, long life motors
New mercury free float switches
Size: 350, 500, 750, 1100, 1500, 2000, 3000,
3500 gph in 12 and 24 volt versions
Easy clean snap-lock strainer bases
Anti-Airlock protection
Exclusive moisture tight seals
Completely submersible
Marine grade blocked wiring
Silent and vibrationless operation

Typical Applications


Marine
RV & Campers
Industrial

PUMP

Liquid Temperature
110°F (43°C) Max.
Priming Capabilities
Not needed flooded suction
Power
3.5 amps max current draw
Max Pressure
Not needed

MOTOR

Type
Compact, efficient, long life motor
Leads
18 AWG, 1 m long Leads
Temperature Limits
110°F (43°C) Max.
Duty Cycle
Intermittent
Voltage
12v/24v

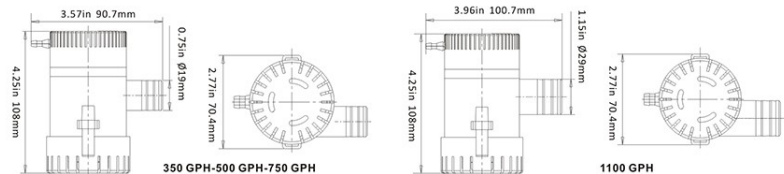

STANDARD PUMP CONFIGURATIONS

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia	N.W./G.W
SFBP1-G350-01	350 GPH	12 V	1.8 A	3 m	1 m	19 mm/3/4"	0.33/0.40 kg
SFBP1-G500-01	500 GPH	12 V	2.2 A	3 m	1 m	19 mm/3/4"	0.33/0.40 kg
SFBP2-G500-01	500 GPH	24 V	1.2 A	3 m	1 m	19 mm/3/4"	0.33/0.40 kg
SFBP1-G750-01	750 GPH	12 V	2.5 A	3 m	1 m	19 mm/3/4"	0.33/0.40 kg
SFBP2-G750-01	750 GPH	24 V	1.5 A	3 m	1 m	19 mm/3/4"	0.33/0.40 kg
SFBP1-G1100-01	1100 GPH	12 V	3.5 A	4 m	1 m	29 mm/1-1/8"	0.38/0.44 kg
SFBP2-G1100-01	1100 GPH	24 V	1.5 A	4 m	1 m	29 mm/1-1/8"	0.38/0.44 kg



Non - Automatic Bilge Pumps 01 Series

Features & Benefits

Pump and switch are stand alone products
Compact, efficient, long life motors
New mercury free float switches
Size: 350, 500, 750, 1100, 1500, 2000, 3000,
3500 gph in 12 and 24 volt versions
Easy clean snap-lock strainer bases
Anti-Airlock protection
Exclusive moisture tight seals
Completely submersible
Marine grade blocked wiring
Silent and vibrationless operation

Typical Applications


Marine
RV & Campers
Industrial

PUMP

Liquid Temperature
110°F (43°C) Max.
Priming Capabilities
Not needed flooded suction
Power
13.0 amps max current draw
Max Pressure
Not needed

MOTOR

Type
Compact, efficient, long life motor
Leads
18 AWG, 1 m long Leads
Temperature Limits
110°F (43°C) Max.
Duty Cycle
Intermittent
Voltage
12v/24v

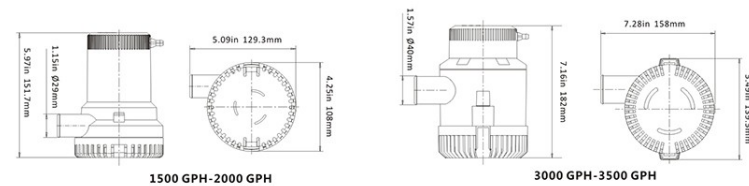

STANDARD PUMP CONFIGURATIONS

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia	N.W./G.W
SFBP1-G1500-01	1500 GPH	12V	7.0A	5 m	1 m	29 mm/1-1/8"	1.13/1.21 kg
SFBP2-G1500-01	1500 GPH	24V	5.0A	5 m	1 m	29 mm/1-1/8"	1.13/1.21 kg
SFBP1-G2000-01	2000 GPH	12V	9.0A	6 m	1 m	29 mm/1-1/8"	1.13/1.21 kg
SFBP2-G2000-01	2000 GPH	24V	5.5A	6 m	1 m	29 mm/1-1/8"	1.13/1.21 kg
SFBP1-G3000-01	3000 GPH	12V	12.0A	8 m	1 m	40 mm/1-1/2"	2.10/2.37 kg
SFBP2-G3000-01	3000 GPH	24V	7.0A	8 m	1 m	40 mm/1-1/2"	2.10/2.37 kg
SFBP1-G3500-01	3500 GPH	12V	13.0A	8 m	1 m	40 mm/1-1/2"	2.10/2.37 kg
SFBP2-G3500-01	3500 GPH	24V	8.0A	8 m	1 m	40 mm/1-1/2"	2.10/2.37 kg